
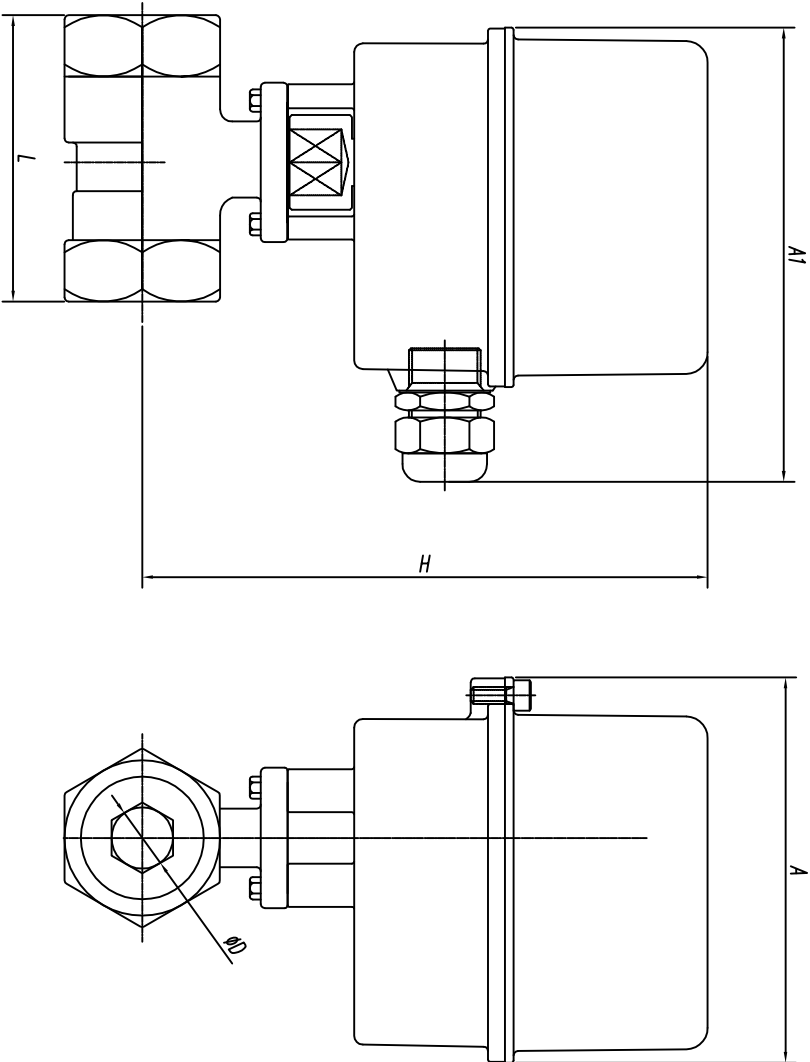



10

FOR APPROVAL



■ DIMENSIONS

Model	SIZE		A	A1	H	L	ØD
	mm	inch					
ITQ0020-10S1	10A	3/8"	89.4	109.7	121.5	45	7.7
ITQ0020-15S1	15A	1/2"	89.4	109.7	124.5	56.5	9.2
ITQ0020-20S1	20A	3/4"	89.4	109.7	129.5	59	12.5
ITQ0020-25S1	25A	1"	89.4	109.7	132.5	71	15
ITQ0020-32S1	32A	1-1/4"	89.4	109.7	135.5	78	20

■ Unit:mm





■ Actuator Specification

TITLE		
EAELECTRIC ACTUATOR 1-PIECE VALVE		
DESCRIPTION	MATERIAL	Q'ty
BODY	AC2B	1
TOP COVER	AC2B	1
HANDLE	AC2B	1
LEVER	SM45C	1
BASE	GF250	1
DRIVE BUSHING	SM45C	1
CONDUIT ENTRIES		1
STOPPER BOLTS	SUS316	1
VALVE-BODY	SCS14	
VALVE-BALL	SUS316	
VALVE-SEAT	PTFE	

Specification	Type	Electric actuator
Enclosure		Weatherproof IP66
Main Power supply		AC110/220V 1Ph/50/60Hz, DC24V
Operating time (50/60Hz)		ITQ0020(11SEC)
No of Handle turns		
Designed by	Checked by	Approved
PARK, D. G		
TAESUNG		
Title		1-PCS SCREW BALL VALVE (10A ~ 50A)
Model		ITQ-S1 SERIES
		Drawing no. TS090730-01

11

FOR APPROVAL

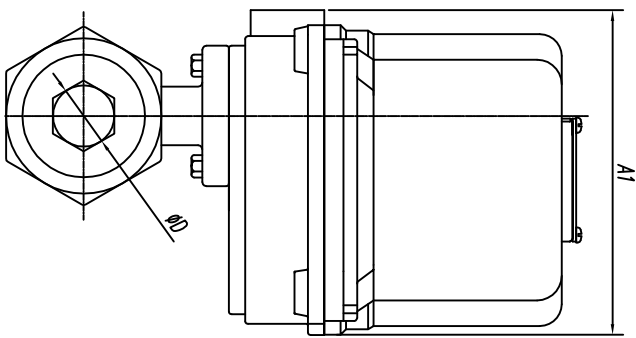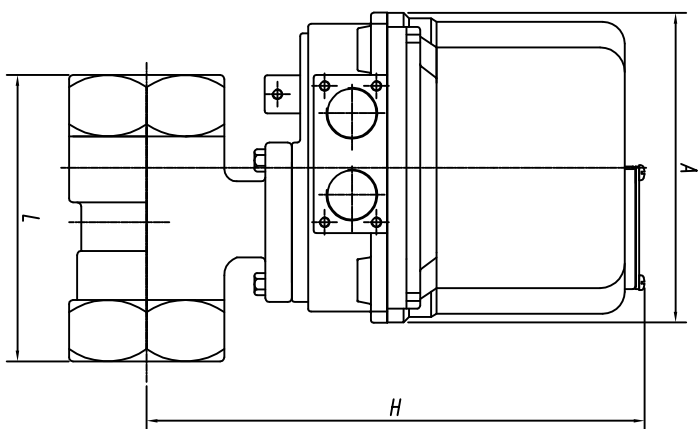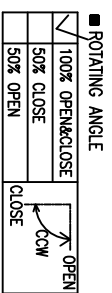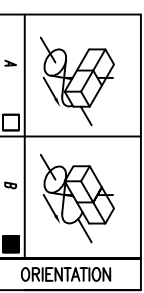

■ DIMENSIONS

Model	SIZE		A	A1	H	L	ØD
	mm	inch					
ITQ00020-10S1	10A	3/8"	89.4	109.7	121.5	45	7.7
ITQ00020-15S1	15A	1/2"	89.4	109.7	124.5	56.5	9.2
ITQ00020-20S1	20A	3/4"	89.4	109.7	129.5	59	12.5
ITQ00020-25S1	25A	1"	89.4	109.7	132.5	71	15
ITQ00020-32S1	32A	1-1/4"	89.4	109.7	135.5	78	20
ITQ00040-40S1	40A	1-1/2"	113.5	121.8	181	82	25
ITQ00040-50S1	50A	2"	113.5	121.8	189	100	32

■ Unit:mm

■ Actuator Specification

Specification	Type	Electric actuator
Enclosure	Weatherproof IP66	
Main Power supply	110/220V AC 1Ph/50/60Hz, DC24V	
Operating time (50/60Hz)	ITQ00040(14/12SEC)	
No of Handle turns	ITQ00040(7.5)	
Designed by	Checked by	Approved
PARK, D. G		
 TAESUNG		
Title 1-PCS SCREW BALL VALVE (10A ~ 50A)		
Model ITQ-S1 SERIES		
Drawing no. TS090730-01		