
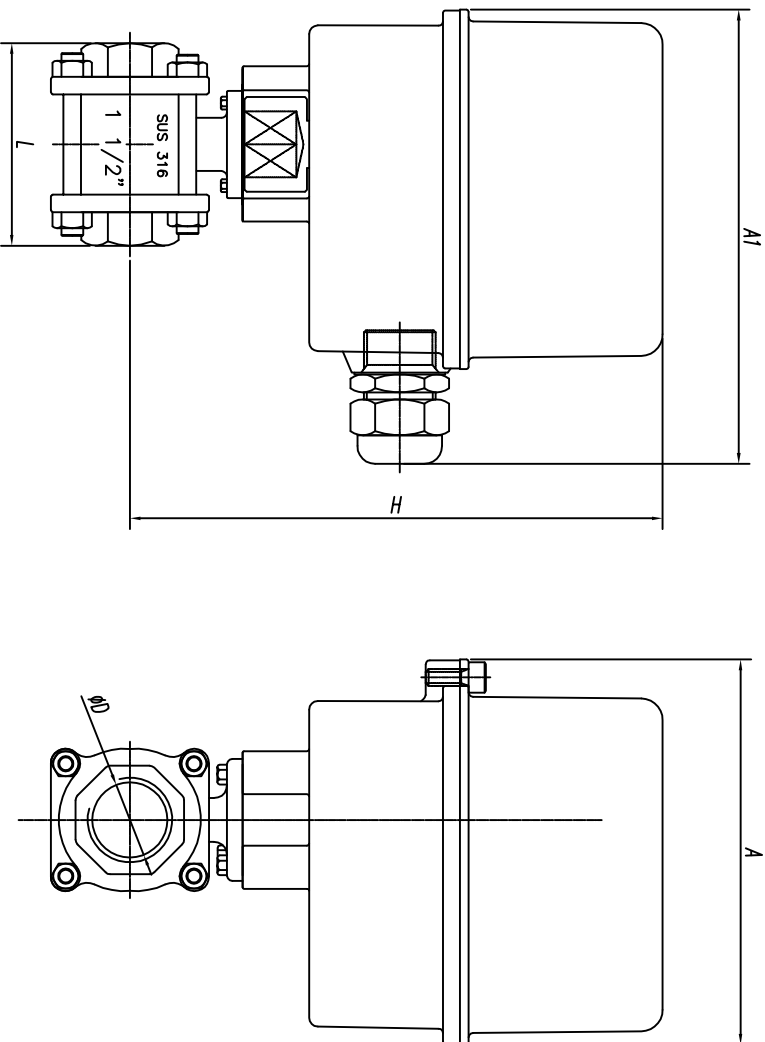



10

FOR APPROVAL



DIMENSIONS

Model	SIZE		A	A1	H	L	ØD
	mm	inch					
ITQ0040-08S3	08A	1/4"	89.4	109.7	173	60	08
ITQ0020-10S1	10A	3/8"	89.4	109.7	173	60	10
ITQ0020-15S1	15A	1/2"	89.4	109.7	173	65	15
ITQ0020-20S1	20A	3/4"	89.4	109.7	175	75	20

Unit:mm

Actuator Specification




TITLE			
EAELECTRIC ACTUATOR			
3-PIECE VALVE			
DESCRIPTION	MATERIAL	Q'ty	
BODY	AC2B	1	
TOP COVER	AC2B	1	
HANDLE	AC2B	1	
LEVER	SM45C	1	
BASE	GF250	1	
DRIVE BUSING	SM45C	1	
CONDUIT ENTRIES		1	
STOPPER BOLTS	SUS316	1	
VALVE-BODY	SCS14		
VALVE-BALL	SUS316		
VALVE-SEAT	PTFE		

Specification	Type	Electric actuator			
Enclosure		Weatherproof IP66			
Main Power supply		AC110/220V 1Ph/50/60Hz, DC24V			
Operating time (50/60Hz)		ITQ0020(11SEC)			
No of Handle turns					
Designed by	Checked by	Approved	File name	Date	Scale
PARK D. G			MOTOR	2009.08.07	N:S
			Unit	mm	
			Title	1-PCS SCREW BALL VALVE (8A ~ 20A)	
			Model	ITQ0020-S3 SERIES	
				Drawing no. TS090801-01	



01

FOR APPROVAL

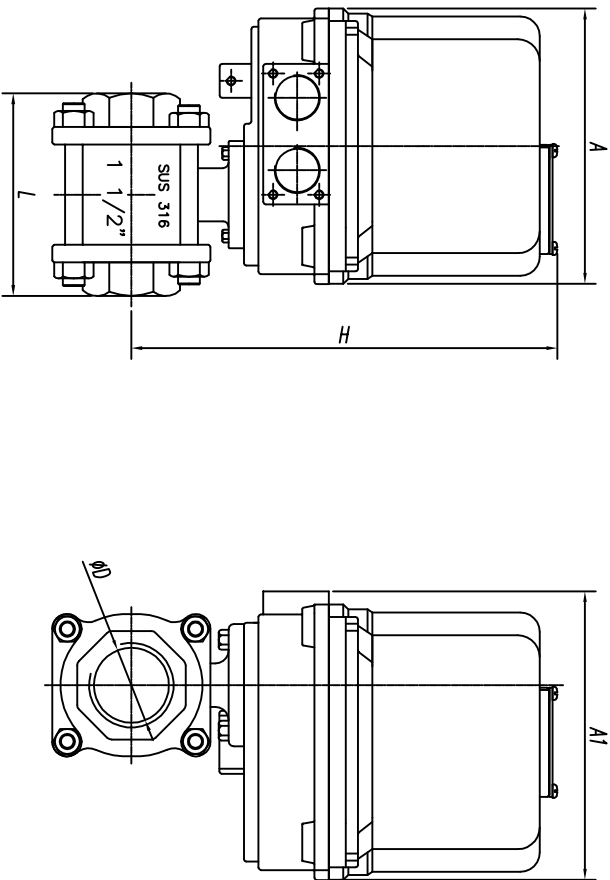

TITLE		
EAECTRIC ACTUATOR 3-PIECE VALVE		
DESCRIPTION	MATERIAL	Q'ty
BODY	AC2B	1
TOP COVER	AC2B	1
HANDLE	AC2B	1
LEVER	SM45C	1
BASE	GF250	1
DRIVE BUSING	SM45C	1
CONDUIT ENTRIES		1
STOPPER BOLTS	SUS316	1
VALVE-BODY	SCS14	
VALVE-BALL	SUS316	
VALVE-SEAT	PTFE	

Actuator Specification

Specification	Type	Electric actuator
Enclosure		Weatherproof IP66
Main Power supply		AC110/220V 1Ph/50/60Hz, DC24V
Operating time (50/60Hz)		ITQ0020(11SEC)
No of Handle turns		

Designed by	Checked by	Approved	File name	Date	Scale	Unit
PARK, D. G.			MOTOR	2009.08.01	N:S	mm

 TAESUNG		Title	SCREW BALL VALVE (25A ~ 32A)
Model	ITQ0040-3PC	Drawing no.	TS090801-02




DIMENSIONS

Model	SIZE	A	A1	H	L	φD
ITQ0040-25S3	25A	113.5	121.8	216	85	25
ITQ0040-32S3	32A	113.5	121.8	227	100	32

SCREW

02

FOR APPROVAL

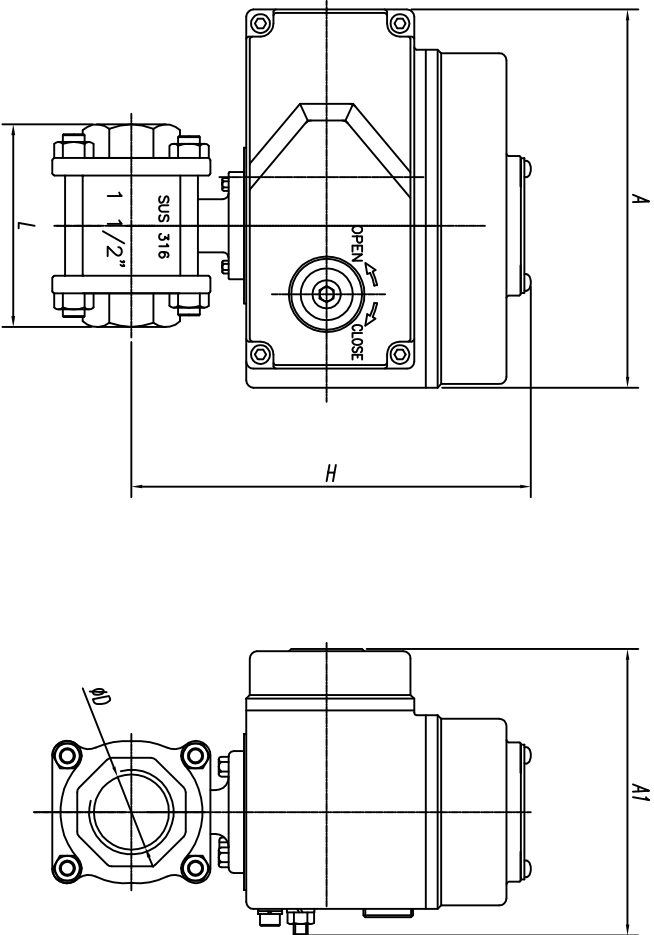

TITLE		
EAECTRIC ACTUATOR 3-PIECE VALVE		
DESCRIPTION	MATERIAL	Q'ty
BODY	AC2B	1
TOP COVER	AC2B	1
HANDLE	AC2B	1
LEVER	SM45C	1
BASE	GF250	1
DRIVE BUSING	SM45C	1
CONDUIT ENTRIES		1
STOPPER BOLTS	SUS316	1
VALVE-BODY	SCS14	
VALVE-BALL	SUS316	
VALVE-SEAT	PTFE	

Actuator Specification

Specification	Type	Electric actuator
Enclosure		Weatherproof IP66
Main Power supply		AC110/220V 1Ph/50/60Hz, DC24V
Operating time (50/60Hz)		ITQ0020(11SEC)
No of Handle turns		

Designed by	Checked by	Approved	File name	Date	Scale	Unit
PARK, D. G			MOTOR	2009.08.01	N:S	mm

DIMENSIONS

Model	SIZE	A	A1	H	L	φD
ITQ0080-40S3	mm	40A	121	231	110	40
ITQ0080-40S3	inch	1-1/2"	121	231	110	40
ITQ0080-50S3	mm	50A	160	239	130	50
ITQ0080-50S3	inch	2"	160	239	130	50

SCREW

TAESUNG	TAESUNG	TAESUNG
Model	ITQ0040-3PC	Drawing no. TS090801-03